

## PRODUCT DATA SHEET RCV3G25E-F8 - 3400 RPM






## **S***PECIFICATIONS*

MAX GPM	3.0
MAX PSI	2500
Power EBHP	5.1
STROKE MM	6.5
Мах Темр	140°
Inlet Thread	1/2″F

MAX LMP	11.4
Max Bar	170
Bore Dia. mm	15
WEIGHT LBS	11
OIL CAPACITY	<b>9.81</b> oz
DISCHARGE THREAD	3/8″F

**D***imensions* 

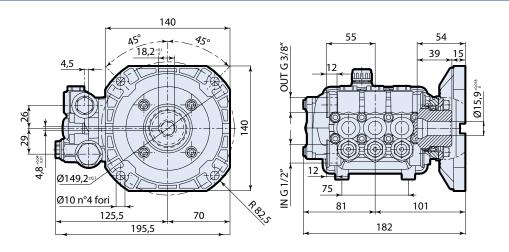

Measurements are - mm

## **F**EATURING

*Manifold:* High strength forged brass for long term use. *Bolts:* Eight 6mm.

**Plungers:** NEW Ceramic Plungers, thicker wall to help prevent thermal shock.

Valves: Stainless Steel, valve seat o-ring is side mounted.

**Seals:** High quality high pressure seals. NEW low-pressure seal with a built in scraper.

Piston Guides: Two piece piston guides.

**Drive End:** NEW connecting rod with 12% more load surface. Large side cover sight glass, oversized bearing. Rear cover oil drain.

Crankshaft: Forged, precision ground.