

PRODUCT DATA SHEET RRA3G30E-F17 - 1750 RPM


DESCRIPTION



SPECIFICATIONS

Max GPM	3.0	Max LMP	11.4
Max PSI	3000	Max Bar	207
Power EBHP	6.2	Bore Dia. mm	18
STROKE MM	9.2	Weight Lbs	18
MAX TEMP	140°	OIL CAPACITY	13.35oz
INLET THREAD	1/2"F	DISCHARGE THREAD	3/8"F

DIMENSIONS

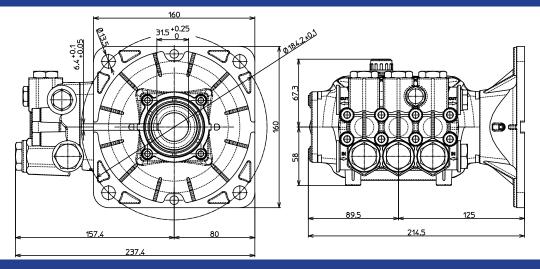

Measurements are - mm

FEATURING

Manifold: High strength forged brass for long term use.

Bolts: Eight 6mm.

Plungers: NEW Ceramic Plungers, thicker wall to help prevent thermal shock.

Valves: Stainless Steel, valve seat o-ring is side mounted.

Seals: High quality high pressure seals. NEW low-pressure seal with a built in scraper.

Piston Guides: Two piece piston guides.

Drive End: NEW connecting rod with 12% more load surface. Large side cover sight glass, oversized bearing. Rear cover oil drain.

Crankshaft: Forged, precision ground.